



Extra long planks
with high-end performance

XL-END

EN

SK - PL - RU - HU - CZ - LT



YOUR CORETEC® FLOOR, MADE WITH CARE

We have a passion for providing a wide selection of authentic natural looks, so you can express what makes you, you. Persistent in product innovation – including micro-beveled edges, enhanced painted bevels & Embossed in Register technology – we create the most appealing designs & textures available.

When choosing a floor from this collection, you choose for a warm atmosphere and a powerful look. The exceptionally long planks are no less than **2.10 meters long** and **15 mm thick**. Thanks to the extra thick wear layer of 0.8 mm, these classy floors score excellently in terms of wear and impact resistance.

AN EXTRA THICK NATURAL BACKING

All our floors have a unique attached cork underlayment. Why? It's warmer, quieter and easily installs over existing hard surfaces, perfectly concealing imperfections in subfloors. And: it's one of the most sustainable materials out there. Cork is harvested from the cork tree and can be re-harvested every decade without damaging the tree.

A natural solution that brings only benefits to your home or business:



Added sound insulation



A comfortable and warmer floor



A natural protection against mold and mildew




No need for separate underlayment



Absorbs subfloor imperfections



EXTRA LONG, EXTRA STRONG SOUND CORE[®] 15 mm

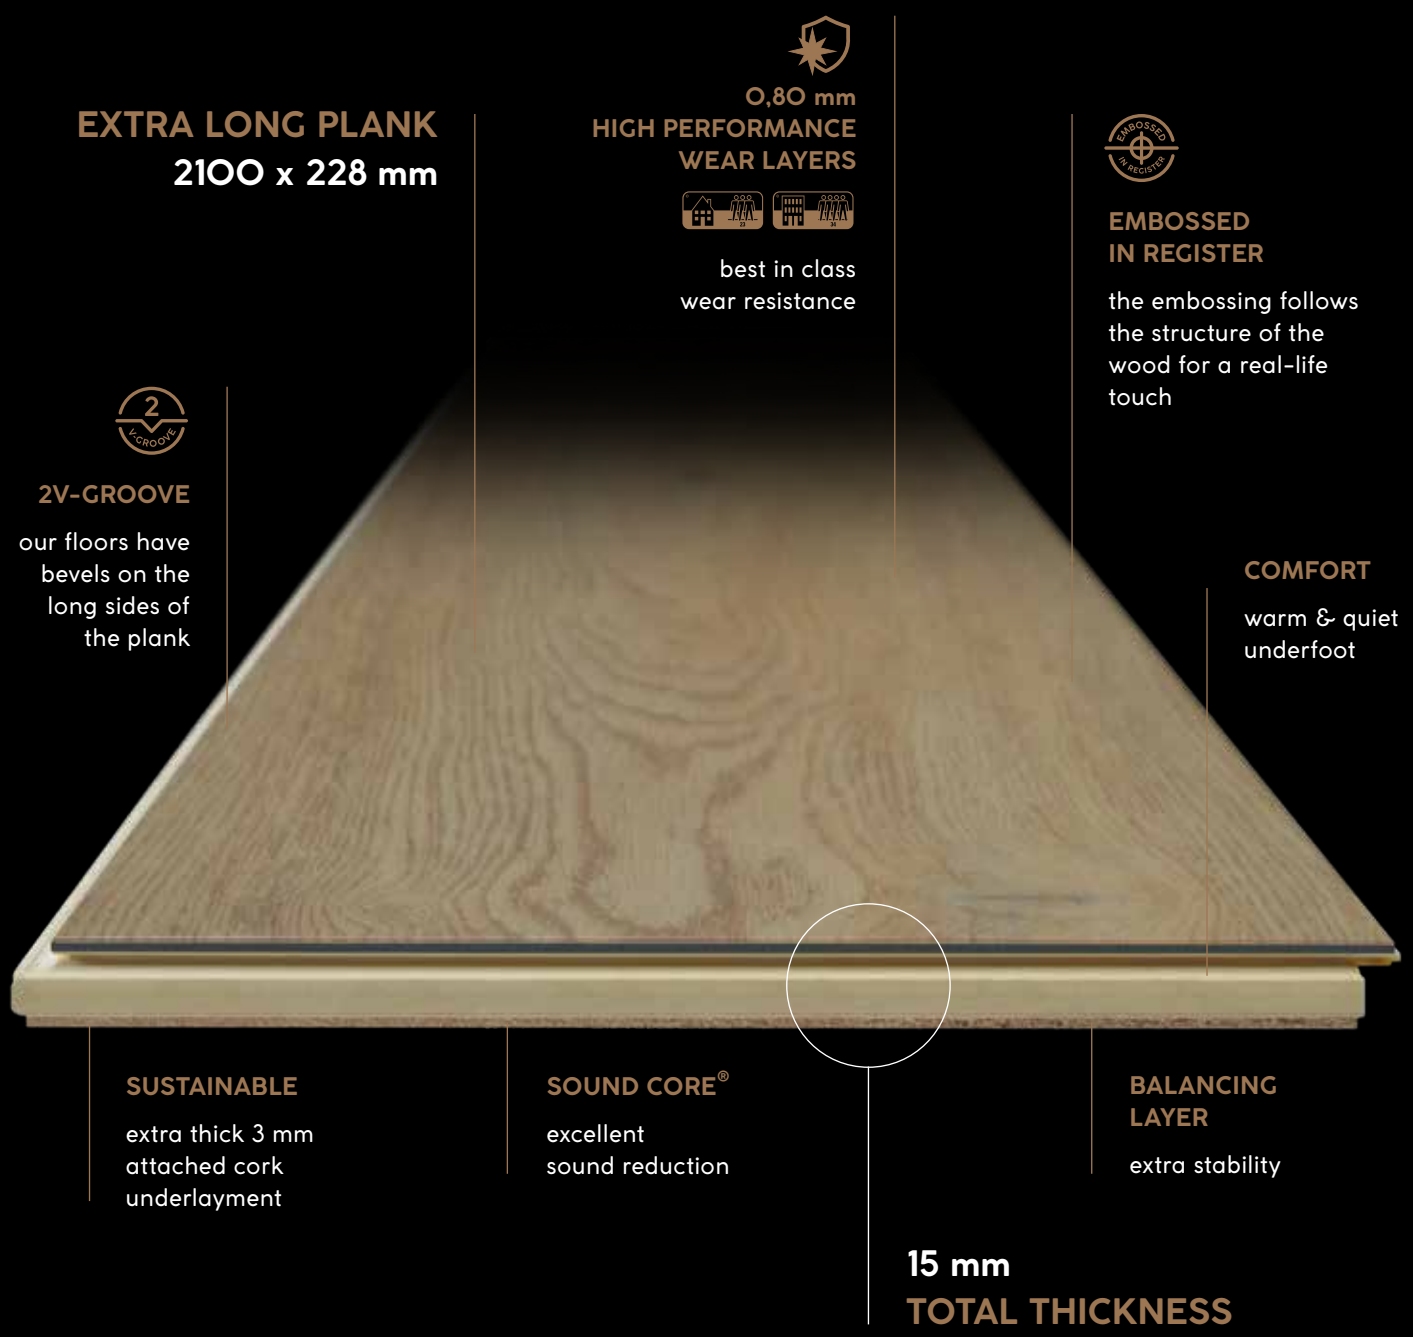

Best in class wear resistance
Najlepši v triede odolnosť proti opotrebovaniu /
Najlepsza w swojej klasie odporność na zużycie /
Лучшая в своем классе износостойкость /
A kategória legjobb kopásállósága / Nejlepší
odolnost proti opotřebení ve své třídě /
Geriausias klasėje atsparumas dilimui



100% waterproof
100% Vodeodolná / 100% Wodoodporna
/ 100% водостойкое / 100% vízállóság
/ 100% voděodolná podlaha / 100%
vandeniui atsparios grindys



Easy to install
Jednoduchá inštalácia / Łatwy i szybki montaż /
Легкая укладка / Könnyen lerakható / Snadná
montáž na klik / Lengva montuoti



Electrostatic performance
Elektrostatické prevedenie / Akumulacja ładunków
elektrostatycznych / Электростатичность
/ Antisztatikus / Elektrostatické vlastnosti /
Elektrostatinis veikimas



Extremely stable
Extrémne stabilný / Wyjątkowo stabilna /
чрезвычайно стабильный / Extrém stabilitás /
Extrémní stabilita / Ekstremalus stabiluma



Reduces noise
Zniża hłuk / Zmniejsza hałas /
Сокращает шум / Hangcsökkentő /
Redukce zvuku / Garso mažinimas



No acclimatization necessary
Nevyžaduje sa aklimatizácia / Nie jest wymagana
aklimatyzacja / Не требуется акклиматизация
/ Nincs szükség aklimatizálásra lerakás előtt /
Aklimatizace není třeba / Nereikia aklimatizacijos



Pet proof
Odolná proti zvieratám / Przystosowany dla
zwierząt domowych / Защита от домашних
животных / Háziállatálló / Odolnost vůči
zvířatům / Atsparumas gyvūnams




Installation on any surface
Inštalácia na akýkoľvek povrch / Montaż na
każdej powierzchni / Укладка на любую
поверхность / Bármilyen felületre lerakható
/ Instalace přímo na stávající podlahy /
Montavimas ant bet kokio paviršiaus



Ideal for underfloor heating & cooling
Vhodná na podlahové vykurovanie a chladenie
/ Nadaje się do ogrzewania i chłodzenia
podłogowego / Подходит для полов с подогревом
и охлаждением / Padlófűtés/hűtés esetén is
alkalmazható / Vhodné pro podlahové vytápění /
chlazení / Tinka grindiniam šildymui ir vėsšinimui


AN EXCLUSIVE WATERPROOF SELECTION



CHANTILLY
50 LVREXL 2599



BELVOIR
50 LVREXL 2594




MONTCLAIR
50 LVREXL 2557




EGMONT
50 LVREXL 2553



KANTARA
50 LVREXL 2515



WINDSOR
50 LVREXL 2683



FONTENEAU
50 LVREXL 2686



CHANTILLY

50 LVREXL 2599

XL-END







BELVOIR
50 LVREXL 2594

XL-END





MONTCLAIR

50 LVREXL 2557

XL-END







EGMONT

50 LVREXL 2553

XL-END





KANTARA

50 LVREXL 2515

XL-END







WINDSOR

50 LVREXL 2683

XL-END





FONTENEAU

50 LVREXL 2686

XL-END







Accessories




Paintable skirtings

Our paintable skirtings are 100% waterproof & shock resistant.



Matching design accessories

Our design accessories match the design of your floor & are also 100% waterproof & shock resistant.




Installation

Easy installation

COREtec® floors have the easiest install on the market.

Watch our installation video on our website.
www.coretecfloors.com

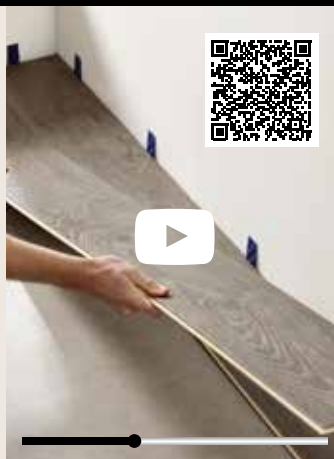

Maintenance

The COREtec® Clean, quick & green kit:

- Daily cleaner
- Deep cleaner
- Stain remover



XL-END

EASY TO INSTALL
& EFFORTLESS
MAINTENANCE



COREtec® floors are
that good, somebody else
can re-*enjoy* it.

At COREtec® Floors, we attach great importance to sustainability. Recycling our multilayer, multicomponent material has a high energy cost, which means that a circular solution with re-use of the flooring is more appropriate. That's why we come up with an environmentally friendly solution: to set up Second Life floors, based on infinite re-use, an approach which is unique in our sector.

As the architects of multilayer waterproof rigid flooring, we are the first manufacturers to set up a take-back service, giving used flooring a new lease of life. These Second Life floors will initially be offered to charitable bodies and youth organisations. Our new service also has a societal dimension, as the business we call on to clean the used flooring employs people with complex barriers to work. They will use specially developed ecologically friendly COREtec® products to clean the dismantled flooring, making the old flooring look as good as new.

Thanks to Second Life, your old floor gets a real second chance.
And therefore you also contribute to a more sustainable world!



Technical specifications



3 pcs
1,44 m²
± 22 kg



2100 x 228 mm



15 mm



0,80 mm

LEVEL OF USE

Úroveň použitia / Klasa ścieralności /
Класс использования / Európai besorolás /
Úroveň použití / Atsparumo klasė
Class 23 / 34 (EN ISO 10874)

GEOMETRICAL CHARACTERISTICS

Geometrické parametre / Charakterystyka Geometryczna /
геометрических характеристики / Geometriai jellemző /
Rozměry / Geometrinės savybės
Conform (EN 17539)

WEAR RESISTANCE

Odolnosť voči opotrebeniu / Wytrzymałość
na zużycie / износостойкость / Korásállóság /Odolnost
proti opotřebení / Atsparumas dilimui
Pass 7000 cycles (ISO 24338)

CASTOR CHAIR RESISTANCE

Odolnosť voči kolieskam na stoličke / Odporność na krzesła
obrotowe z kółkami / Стойкость к креслам с роликами
/ Görgös szék teszt / Odolnost vůči kolečkovým židlým /
Atsparumas kėdžių ratukams
Pass 25 000 cycles (ISO 4918)

EFFECT OF FURNITURE LEG

Efekt z nôh nábytku / Wpływ nogi meblowej /воздействие
мебельных ножек / Bútorlábhatás / Vliv nábytkové nožky /
Baldų poveikis
No visible change (EN 16581)

RESIDUAL INDENTATION

Trvalá deformácia / Pozostate wgniecenie / остаточные
вмятины / Megmaradó benyomódás / Trvalá deformace /
Likęs įdubimas
≤ 0.10 mm (EN ISO 24343-1)

RESISTANCE TO STAINING

Odolnosť voči napúšťaniu farbou / Odporność na barwienie
/ устойчивость к пятнообразованию / Foltállóság /
Odolnost proti vzniku skvrn / Atsparumas dėmėms
5 (no visible change) (EN 438-2)

LOCKING STRENGTH

Pevnosť pripojenia / Wytrzymałość blokowania /
прочность крепления / Záróerő / Pevnost zajištění /
Blokavimo jėga
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

DIMENSIONAL STABILITY

Rozmerová stabilita / Stabilność wymiarowa /Стабильность
размеров / Méretstabilitás /Rozměrová stabilita / Matmenų
stabilumas
Pass ≤ 0.25% (EN ISO 23999)

COLOUR FASTNESS TO LIGHT

Stálosť farby na svetle / Odporność koloru na światło
/ устойчивость окраски к свету / Színtartósság /
Stalobarevnost na světle / Spalvų atsparumas šviesai
> Grade 6 (EN ISO 105-B-02)

IMPACT SOUND REDUCTION

Akustická izolácia / Izolacja akustyczna /Звукоизоляция /
Hangszigetelés / Akustická izolace / Garso slopinimas
ΔL_w = 20 dB (ISO 10140-3 / EN 717-2)

FORMALDEHYDE EMISSION CLASS

Formaldehydová skupina / Emisja formaldehydu /
Класс эмиссии формальдегида / Formaldehyd csoport /
Formaldehydová skupina / Formaldehyde group
E1 (EN 717-1)

FIRE CLASSIFICATION

Klasifikácia voči požiaru / klasyfikacja ogniowa /
класс огнестойкости / Tűzállósági osztály / Požární
klasifikace / Degumo klasifikacija
Bfl - S1 (EN 13501)

SLIP RESISTANCE

Protišmykovosť / Śliskość / Стойкость к скольжению /
Csúszásmentes / Protiskluznost / Slidumo klasė
DS - R10 (EN 13893 - DIN 51130)

UNDERFLOOR HEATING


Podlahové vykurovanie / Ogrzewanie podłogowe /
Полы с подогревом / Padlófűtésre / Podlahové vykurování /
Šildomos grindys
Suitable (see: Underfloor Heating Guidelines)

ELECTROSTATIC PERFORMANCE

Elektrostatické prevedenie / Akumulacja ładunków
elektrostatycznych / Электростатичность /Elektromos
feltöltődés / Elektrostatiské provedení / Antistatishkumas
≤ 5 kV (EN 1815)

THERMAL RESISTANCE

Tepelná odolnosť / Odporność cieplna / термостойкость /
Hőállóság / Teplotní odolnost /Terminis atsparumas
0.1099 m²-K/W (EN 12667)

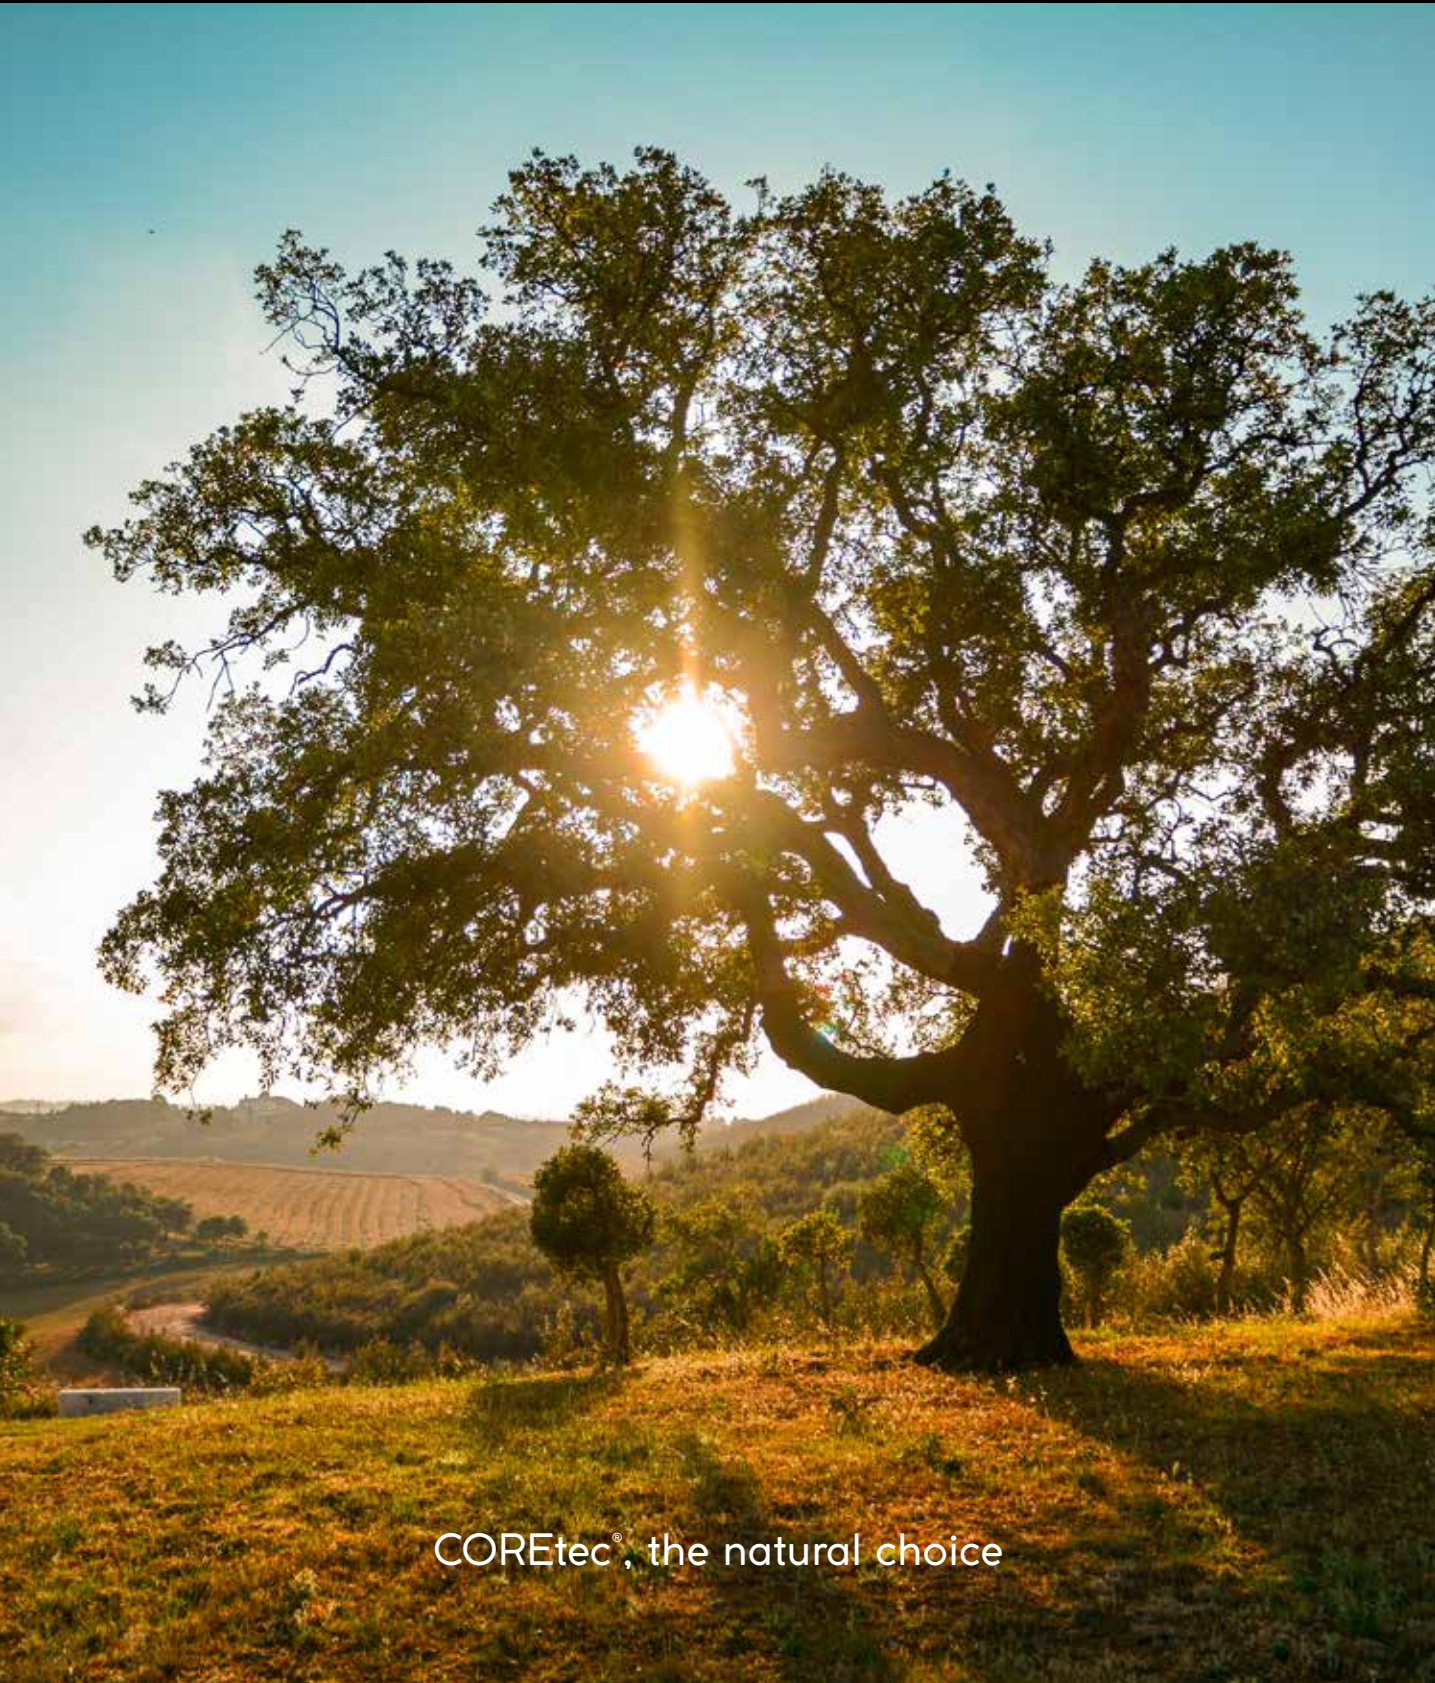



LIFETIME
WARRANTY
RESIDENTIAL



10
YEAR
WARRANTY
COMMERCIAL



US PATENT
APPROVED
2,156,235



UL LIFE FLOOR
CERTIFIED
COREtec QUALITY




CE



GREENGUARD
PRODUCT CERTIFIED FOR
LOW CHEMICAL EMISSIONS
UL/CQM/IGCC
UL 2818
GOLD



AgBB
-geprüft




Bfl-s1
DS
E1
HCHO
←→



PHTHALATE FREE
LEAD FREE
Pb

Warranty (Years) The warranty covers manufacturing defects and premature wear in the event of normal use.
Záruka (rok) Záruka sa vzťahuje na výrobné chyby a predčasné opotrebenie v prípade bežného používania.
Termin gwarancji (rok) Gwarancja obejmuje wadyfabryczne i przedwczesne zużycie w przypadku normalnego użytkowania.
Гарантия (лет) Гарантия покрывает производственные дефекты и преждевременный износ при нормальном использовании.
A garancia gyártási hibákra és idő előtti elhasználódásra általános használatnál érvényes.
Záruka (rok) Záruka se vzťahuje na vady z výroby a predčasné opotrebení v prípade bežného používání.
Garantija (Metai) Garantija taikoma gamybos trūkumams ir per greitam nusidėvėjimui eksploatuojant normaliomis sąlygomis



Souverainestraat 27 - 9770 Kruisem (Belgium)
info@usfloors.be · www.coretecfloors.com